RESEARCH ARTICLE

SAMRIDDHI Volume 14, Issue 3, 2022 Print ISSN: 2229-7111 Online ISSN: 2454-5767

# Minimize Frequency Overlapping of Auditory Signals using Complementary Comb Filters

Sudhir Divekar, Manoj K. Nigam

School of Engineering and Information Technology, MATS University, Raipur, Chhattisgarh, India

## Abstract

Cochlear hearing impairment causes overlapping of auditory speech signals having close frequency contents. Such impairment arises due to the hardening of hearing cells that e ects the frequency-splitting ability of inner ear. Person with such disabilities are unable to distinguish between speech signals with high-frequency correlation. This work proposes an implementation of complementary feedforward comb lters to reduce the overlapping of auditory signals. In auditory frequency overlapping, a lower frequency loses their identities due to presence of higher frequencies. Here, two complementary comb lters have been designed to match alternate critical bandwidths of audio signals. Results shown that presenting these alternate frequency bands to human ear in the even-odd index signi cantly minimizes the frequency overlapping and thereby improves audibility in the hearing impaired.

**Keywords:** Cochlear hearing impairment, Complementary comb lters, Frequency overlapping.

*SAMRIDDHI : A Journal of Physical Sciences, Engineering and Technology* (2022); DOI: 10.18090/samriddhi.v14i03.13

## Introduction

According to the damaged area in the human ear, the hearing impairments are classi ed as conductive, cochlear and retro cochlear impairment. When damage occurs in the outer or middle ear they are termed as conductive impairment, in case of damage location as the inner ear i.e., in the cochlea, it's been referred as cochlear impairment.[1] Lastly, retro cochlear impairments deals with damage in the nerve pathways between the ear and the brain. In conductive impairment, a person can hear the sound with a higher loudness level, and hearing discomfort will also increase. Most often, such conductive impairments are cured through medication or surgical treatment.[2]

Any damage to the transduction functioning of the inner ear causes defection in the cochlea, called cochlear hearing impairment. This impairment deals with losses of inner and outer hearing cells. Aging degenerates the auditory system with the solidi cation of the basilar membrane that losses inner and outer hearing cells from organ of corti. With increasing age, hearing loss becomes mild to severe with degraded speech perception, speci cally with sensitivity loss at higher frequencies.[3, 4]

In recent study, for binaural separation of source the direct sound as well as rst early re ection information has been used to model the comb lter.[5] A comb lter with constant bandwidths has been used to separate the frequency components. Filtered signals have been presented through dichotic as well diotic presentation however, no signi cant improvement has been reported.[6] This is mainly due to the constant bands throughout the audio frequency range and non-viability of binaural fusion in case of two non-similar signals.

To address this issue, we proposed complementary comb lters with critical bandwidths to reduce the overlapping of auditory signals. In auditory frequency overlapping, a lower frequency loses their identities due to the presence of higher frequencies. Here, two complementary comb lters has been designed to match alternate critical bandwidths of audio signals. Results show that presenting these alternate frequency bands to human ear in the even-odd index significantly minimizes the frequency overlapping and thereby improves audibility in hearing impaired.

A further section of paper explores the causes and e ects of auditory frequency overlapping on speech perception ability. The implementation of complementary comb lters has been detailed in the third section. The fourth section discusses the observations derived based on the results obtained. At last the outcomes of proposed methodology have been concluded along with scope for extension of work.

**Corresponding Author:** Sudhir Divekar, School of Engineering and Information Technology, MATS University, Raipur, Chhattisgarh, India, E-mail: sndivekar.pp@gmail.com

**How to cite this article:** Divekar S, Nigam MK. (2022). Minimize Frequency Overlapping of Auditory Signals using Complementary Comb Filters. *SAMRIDDHI : A Journal of Physical Sciences, Engineering and Technology,* 14(3), 333-336.

**Source of support:** Nil

**Con ict of interest:** None

*© The Author(s). 2022 Open Access This article is distributed under the terms of the Creative Commons Attribution 4.0 International License (http://creativecommons.org/licenses/by/4.0/), which permits unrestricted use, distribution, and non-commercial reproduction in any medium, provided you give appropriate credit to the original author(s) and the source, provide a link to the Creative Commons license, and indicate if changes were made. The Creative Commons Public Domain Dedication waiver (http://creativecommons.org/publicdomain/zero/1.0/) applies to the data made available in this article, unless otherwise stated.*

## Auditory Frequency Overlapping

Exposure to high intensity sound is the major cause for cochlear hearing impairment. Inherited defect leads to hair cells losses as well as severe damage to neurons of auditory system. Di culty in hearing high frequencies or increased thresholds for lower frequencies can be observed in typical shapes of audiograms.[7] There are di erent types of cochlear impairment such as severe to moderate bilateral impairment, profound unilateral impairment and highly severe deafness. Other than these issues, cochlear impairments are largely associated with the recruitment of loudness, poor frequency selectivity, and masking in the temporal domain.[8] This paper mainly focuses on identifying the solution for overlapping of auditory signals in the frequency domain.

Frequency selectivity is defined as the capability of the auditory system to distinguish between concurrently presented sinusoidal elements of sound having di erent frequencies. The lower the frequency selectivity, higher will be the frequency overlapping. In cochlear hearing impaired, signals with close frequency contents undergo overlapping on each other that result in losing their identities. In frequency overlapping, audibility threshold of one signal surge due to presence of other signal. Generally, the high-magnitude frequency element decreases the response to low magnitude elements at adjacent frequencies.[9, 10]

Audibility threshold also increases due to loss of inner hair cells, it's because inner hair cells generate vibrations in basilar membrane which are responsible for proper transduction in auditory system.[11] Similarly, loss of outer hair cells induces poor selectivity and reduces sensitivity in hearing low sound pressure signals. Expansion of tuning curves intensifies frequency overlapping. Any disruption in the nerve pathway between the auditory system and brain can also be a major reason to impact the frequency selectivity of the human ear.

## Complementary Comb Filter

A Series of lters with overlaying passbands can be modeled to replicate the functioning of auditory system. The basilar membrane at each location acts as a lter with a particular center frequency. Initially, signal threshold surges with enlargement in the bandwidth of noise. However, later the threshold remains unchanged even if the bandwidth of noise extends further. Such a bandwidth where threshold of signal freeze increases is termed as critical bandwidth. Frequency selectivity can be best way addressed with the concept of critical bandwidth. Throughout the range of audio frequency, critical bandwidths are continuing to reduce with reduction in center frequencies.[12] In cochlear hearing impaired, auditory lter widens because of higher spread of frequency overlapping particularly at higher frequency elements, reducing frequency selectivity.

Frequency overlapping mainly originates through surrounding noise or by the signal itself. In sound signal, vowels rst formant overlaps on the second format and on further higher formant because the level of energy in the rst formant is higher than other subsequent formants. This rst formant also obstructs transitions of other formants, which particularly e ects on identi cation of consonants.[13]

## Design of Feedforward Comb Filters

In this work, to overcome the frequency overlapping, we propose a method based on splitting di erent frequency bands presented to the left and right ear separately. With the objective to sidestep reduced frequency selectivity we have developed a scheme to present alternate bands of frequencies to both the ears. For the same reason, we have designed two comb lters complementary to each other based on critical bandwidths to split the signal's frequency components.

Comb lter has been designed on the basis of feedforward form where the lter is implemented by adding signal with its delayed version.[3] Di erence equation for feedforward comb lter is described in Eq. 1 below.

$$y(n) = x(n) + \alpha x(n-k) \quad (1)$$

Here k is measured in sample, representing length of delay, whereas α is scaling factor. Transfer function derived by applying the z-transform to above equation and represented in the below Eq. 2.

$$H(z) = (\alpha + zk)/zk \quad (2)$$

Frequency response of feedforward comb lter contains sequence of equal spaced notches giving the comb appearance. Magnitude response of feedforward comb lter is given in the Eq. 3.

$$|H(ej\Omega)| = \sqrt{(1+\alpha^2) + 2\alpha\cos(\Omega k)'} \quad (3)$$

Here $(1+\alpha^2)$ is constant, while $2\alpha\cos(\Omega k)$ changes periodically. Therefore, the magnitude response of feedforward comb lter shows periodicity in nature.

**Table 1:** Nine critical bands lter for left ear

| *Bands* | *1* | *3* | *5* | *7* | *9* | *11* | *13* | *15* | *17* |
|---|---|---|---|---|---|---|---|---|---|
| Passband Frequency (kHz) | 0.01-0.20 | 0.30-0.40 | 0.51-0.63 | 0.77-0.92 | 1.08-1.27 | 1.48-1.72 | 2.00-2.32 | 2.70-3.15 | 3.70-4.40 |
| Centre Frequency (kHz) | 0.13 | 0.35 | 0.57 | 0.84 | 1.17 | 1.6 | 2.16 | 2.92 | 4.05 |

**Table 2:** Nine critical bands lter for right ear

| *Bands* | *2* | *4* | *6* | *8* | *10* | *12* | *14* | *16* | *18* |
|---|---|---|---|---|---|---|---|---|---|
| Passband Frequency (kHz) | 0.20-0.30 | 0.40-0.51 | 0.63-0.77 | 0.92-1.08 | 1.27-1.48 | 1.72-2.00 | 2.32-2.70 | 3.15-3.70 | 4.40-5.00 |
| Centre Frequency (kHz) | 0.25 | 0.45 | 0.70 | 1.00 | 1.37 | 1.86 | 2.51 | 3.42 | 4.70 |

### Pass Bands using Comb Filters

Using two comb lters, 18 bands with critical bandwidths has been obtained, where each one is producing nineteen critical bands, one for left ear and other for the right ear. Table 1 and 2 shows the odd and even bands with their pass band frequency and center frequency (kHz). This covers all 18 critical bandwidths of the auditory lters.

This separation of frequency bands helps in alteration of frequency components energy and thereby helps in reducing the frequency overlapping effect. Narrow bandwidths has been set to increase frequency contrast since larger bandwidths tends to atten spectra of input sound signal.

## Results and Discussion

### Comb Filters Response

In the scheme of frequency splitting, two comb lters have been set to produce complementary pass bands, each covering nine pass bands of critical bandwidths. Based on design equations of feedforward comb the magnitude response for each pair has been obtained. This scheme has been designed with MATLAB having toolboxes and blocksets of signal processing, DSP system and audio toolbox. Figure 1 a) shows the magnitude responses of rst feedforward comb lter representing odd bands obtained for presenting to the left ear. Similarly Figure 1 b) shows the resultant magnitude response of second feedforward comb lter covering even bands for presenting to the right ear.

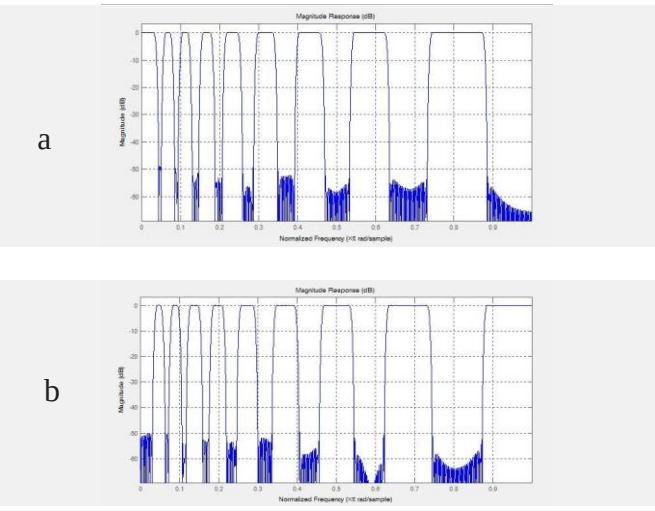


**Figure 1:** Magnitude responses of feedforward comb lters for a) Left Ear b) Right Ear

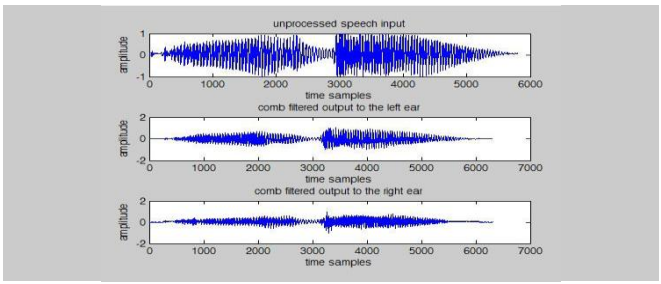


**Figure 2:** a) unprocessed input speech signal. Filtered output for b) left ear c) right ear

Resultant magnitude responses have shown considerable improvement by lowering frequency distortion with minimized ripples in the pass bands and higher attenuation in the stop bands.

### Power Spectrums of Speech Signal

To test the implemented feedforward comb filters, pre-recorded speech signals with VCV context has been used. Figure 2 shows processed outputs for the input speech signal /aza/. This VCV context has been ltered using two complementary feedforward comb lters resulting in two ltered output signals for left and right ear.

Figure 3 shows the power spectrum of processed signals for presenting to the left and right ear. Processed transformation shows a modi cation in attributes of aural. Transitions of formants and mean power spectrums are the attributes of aural. Purpose of selecting power spectrum

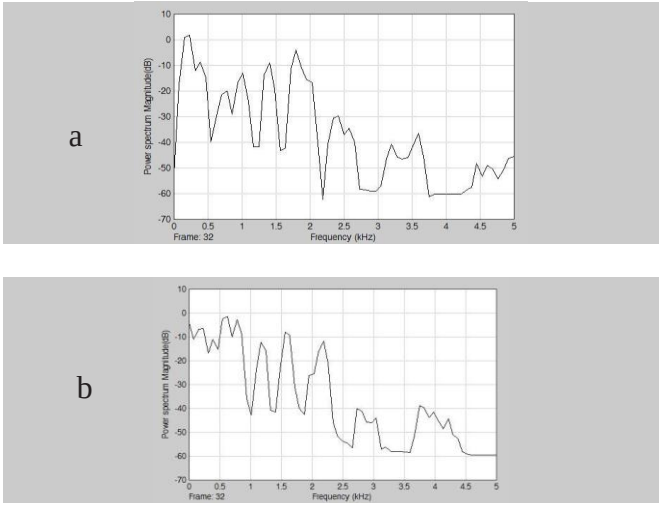


**Figure 3:** Power spectrum of speech signal. Processed signal for a) left ear b) right ear

as quantifying measure is because power spectrums are enriched with lot of information such as articulation place and high magnitude frequency peaks.

## Conclusion

The audibility of cochlear hearing impaired degrades significantly due to higher frequency overlapping. Poor frequency selectivity is the major cause of increased frequency overlapping. To address this issue, we have implemented two complementary feedforward comb lters providing frequency bands that precisely match the critical bandwidths of the auditory system. This pair of lters represent the nine bands in odd-even index manner for simultaneously presenting to the left and right ear. Compared to unprocessed signal, processing methodology reduces perception load and thereby helps in reducing the speech perception time. The power spectrum and magnitude response of processed signals show the scheme's ability to improve the consonantal attributes and frequency selectivity. Overall the proposed methodology remarkably contributes to minimize the frequency of overlapping and plays a major role in enhancing the speech perception for the hearing impaired.

## References


[1] Jongwoo Lim; Yeongjin Kim; Namkeun Kim, "Mechanical E ects of Cochlear Implants on Residual Hearing Loss: A Finite Element Analysis", IEEE Transactions on Biomedical Engineering, Volume: 67, Issue: 11, pp. 3253 – 3261, Nov. 2020.

[2] Luca Remaggi; Philip J. B. Jackson; Wenwu Wang, "Modeling the Comb Filter E ect and Interaural Coherence for Binaural Source Separation", IEEE/ACM Transactions on Audio, Speech, and Language Processing, Volume: 27, Issue: 12, pp. 2263 – 2277, Dec. 2019.

[3] Jonathan S. Abel; Elliot K. Canfield-Dafilou, "Dispersive Delay and Comb Filters Using a Modal Structure", IEEE Signal Processing Letters, Volume: 26, Issue: 12, pp. 1748 – 1752, Dec. 2019.

[4] Valerie Hanson, Kofi Odame, " Real-Time Embedded Implementation of the Binary Mask Algorithm for Hearing Prosthetics", IEEE Transactions on Biomedical Circuits and Systems, Vol. 8, No.4, August 2014.

[5] Tao Zhang, Fred Mustiere, Christophe Micheyl, "Intelligent hearing aids: The next revolution", 38th Annual International Conference of the IEEE Engineering in Medicine and Biology Society (EMBC), Orlando, FL, USA, 16-20 Aug. 2016.

[6] L. Lightburn, E. D. Sena, A. Moore, P. A. Naylor, M. Brookes, "Improving the perceptual quality of ideal binary masked speech", Proc. Int. Conf. Acoust. Speech Signal Process, pp. 661-665, 2017.

[7] D. S. Williamson, D. L. Wang, "Time-frequency masking in the complex domain for speech dereverberation and denoising", IEEE/ACM Transaction on Audio Speech Lang. Process., vol. 25, no. 7, pp. 1492-1501, Jul. 2017.

[8] Yuma Koizumi, Kenta Niwa, Yusuke Hioka, Kazunori Kobayashi, Yoichi Haneda, "DNN-Based Source Enhancement to Increase Objective Sound Quality Assessment Score", IEEE Transactions on Audio Speech and Language Processing, vol. 26, no. 10, pp. 1780-1792, 2018.

[9] Huan Hu; Stojan Radic, "Sub-Nyquist Ultra-Wideband Sparse Signal Reception via Variable Frequency Comb", Journal of Lightwave Technology, pp. 4625 – 4631, Vol: 38, Issue: 17, Sept 2020.

[10] Anil Nagathil; Claus Weihs; Rainer Martin, "Spectral Complexity Reduction of Music Signals for Mitigating E ects of Cochlear Hearing Loss", IEEE/ACM Transactions on Audio, Speech, and Language Processing, Volume: 24, Issue: 3, pp. 445 – 458, March 2016.

[11] Sandeep Kolluri et al. "A New Control Architecture With Spatial Comb Filter and Spatial Repetitive Controller for Circulating Current Harmonics Elimination in a Droop-Regulated Modular Multilevel Converter for Wind Farm Application", IEEE Transactions on Power Electronics, Vol. 34, Issue: 11, pp. 10509 – 10523, Nov. 2019.

[12] Nalluri, S. K., & Parasaram, V. K. B. (2015). Automating Software Builds with Jenkins: Design Patterns and Failure Handling. International Journal of Technology, Management and Humanities, 1(01), 16-33. https://doi.org/10.21590/ijtmh.01.02.03

[13] Wang Xia; Jiang Hao; Liang Ruiyu; Wang Qingyun; Zhao Li; Zou Cairong, "An Integrated Frequency Lowering Algorithm for Sensorineural Hearing Impairment", IEEE Eighth International Conference on Measuring Technology and Mechatronics Automation (ICMTMA), Macau, China, 11-12 March 2016.

[14] Thijs van de Laar; Bert de Vries, "A Probabilistic Modeling Approach to Hearing Loss Compensation", IEEE/ACM Transactions on Audio, Speech, and Language Processing, Volume: 24, Issue: 11, pp. 2200 – 2213, Nov. 2016.