

Color Objects Detection in Real-time with Raspberry Pi and Image Processing

K. V. Kalyan Chakravarthy^{1*}, M. Vamshi Krishna²

¹Assistant Professor, Department of CSE, Centurion University of Technology and Management, Gidijala, Andhra Pradesh, India

²Professor, Department of ECE, Dhanekula Institute of Engineering and Technology, Ganguru, Vijayawada, Andhra Pradesh, India

ABSTRACT

Color has been broadly utilized continuously in many applications. It offers a few massive focal points over geometric prompts, for example, computational straightforwardness, heartiness under partial impediment, pivot, scale, and goal changes. Even though color techniques end up being proficient in an assortment of computer vision applications, there are a few issues related to these strategies for which color tracking is one of the most significant. Color has been generally utilized in machine-based vision frameworks for assignments, for example, picture division, object tracking, and detection. The objective of this task is the proficient following of tracking color objects from a grouping of live pictures for use continuously applications including observation and robot route. This paper addresses building a real-time tracking framework comprising standard equipment and effort for tracking various objects from an edge arrangement progressively.

Keywords: Real-time color tracking, Thresholding, RGB color space

SAMRIDDI : A Journal of Physical Sciences, Engineering and Technology (2021); DOI: 10.18090/samriddi.v13i01.2

INTRODUCTION

Tracking various objects in video surveillance systems turns into a significant assignment for applications where quick image processing calculations are needed at the hour. Different algorithms are there to track the moving article where classified image processing uses Kalman filter. While using image processing and computer vision method, the computerized camera appears to have a progressively adaptable capacity to track color objects. Kalman filter is used to track the round object in a given area when the object is in motion. If the object is not in motion, i.e., nonlinear and non-Gaussian, Kalman filter finds it challenging to track the object. So a methodology is adopted to track by using Hue-saturation-value (HSV), luma and chrominance components (YUV), red-green-blue (RGB) color-based tracking. The Otsu method is used to classify images into two classes, foreground and background. It gives a single intensity threshold value. A new algorithm (spectral sharpening algorithm) is demonstrated to enhance the performance of color for identification, which enhances colored object detection and tracking.

METHODOLOGY

The RGB color model is mainly used in Computer Vision. The input taken by the camera is in the RGB color model. It should be converted to the Hue, Saturation, and Value (HSV) color

Corresponding Author: K. V. Kalyan Chakravarthy, Assistant Professor, Department of CSE, Centurion University of Technology and Management, Gidijala, Andhra Pradesh, India, e-mail: tokalyankv@gmail.com

How to cite this article: Chakravarthy, K.V.K., Krishna, M.V., (2021). Color Objects Detection in Real-Time with Raspberry Pi and Image Processing. *SAMRIDDI: A Journal of Physical Sciences, Engineering and Technology*, 13(1), 5-7.

Source of support: Nil

Conflict of interest: None

model to match the threshold value. HSV color conversion is similar to human color perceiving; hence it is used. SIFT algorithm is used to detect features of the image like color. Each pixel value of the images is matched with each color's threshold values by using inRange function, and these pixels are filtered. All these pixels filtered together form the required color object. Thus the threshold value of each pixel is found, and the colored objects are detected.

Step 1: The real-time data was collected using a webcam using the command video capture.

Step 2: The collected real-time data was converted into HSV color model from RGB color model. For this, color conversion command cv2.cvtColor() can be used.

Step 3: SIFT algorithm is used for finding the features of the image, like color. In this inRange command is used to

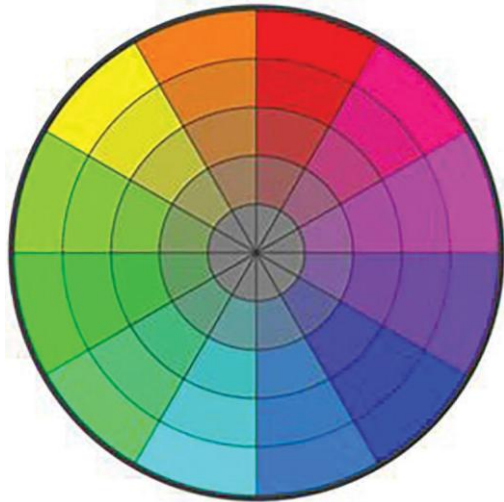


Figure 1: RGB color model

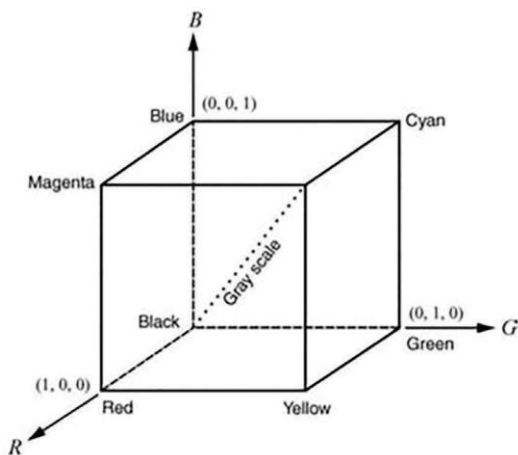


Figure 2: Cartesian system

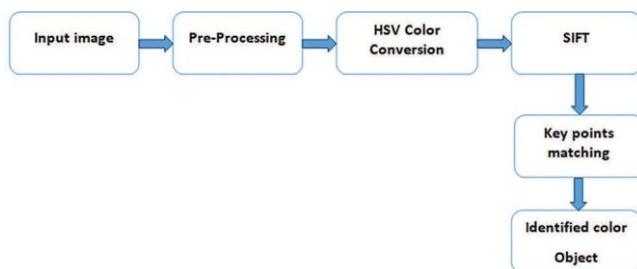


Figure 3: Flow chart

set a threshold value of the required color. For example, red color needs to be detected, the upper and lower threshold values of red must be mentioned in the inRange command.

Step 4: This inRange command iterates the pixels with a pixel value in the range of red or some other required color mentioned in the inRange command previously. The function inRange is assigned to the mask function, which masks the part of the image that does not match the pixel values mentioned in the inRange command.



Figure 4: Set up of the project



Figure 5: Set up with web cam

Step 5: All these pixels in the required color range were iterated, and the color object was detected. The remaining pixels are covered by a black mask, like in figure 6 and figure 7.

REQUIREMENTS

- 1. Raspberry Pi 3** - The Raspberry Pi is a progression of small single-board computers developed in the United Kingdom by the Raspberry Pi Foundation.
- 2. Pi Camera** - The Pi camera module is a compact light weight camera that bolsters Raspberry Pi. It imparts with Pi using the MIPI camera serial interface convention. It is typically utilized in image processing, AI, or reconnaissance ventures



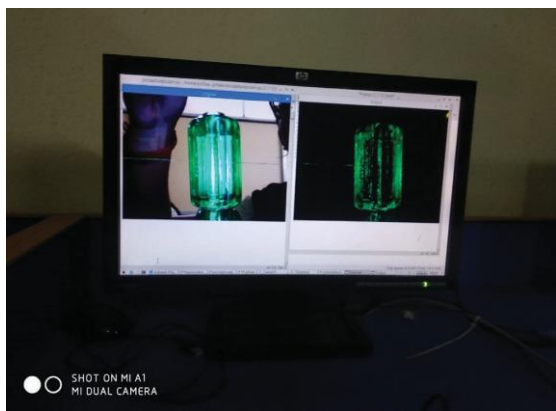


Figure 6: Single Color Green Is Detected



Figure 7: Both Green and Blue Colors Are Detected

3. HDMI

4. **SD Card** - To load open CV and the project and required libraries.

5. **Python** -Python is an interpreted, elevated level, broadly helpful programming language.

6. **Open CV** – **Open CV** is a library of programming functions mainly used at real-time computer vision applications

7. **Raspbianbuster** - The Raspbian Buster released as the replacement of Raspbian Stretch, which was the default Raspberry Pi working system, is good with all the models of Raspberry Pi. Buster is dependent on the most recent adaptation of Debian Linux 10

RESULTS

By consolidating the camera input and the item facilitate, we can make the Raspberry Pi track the object any place it

goes. On the o chance that we distinguish that the object has moved to the other side of the camera outline, we can utilize the Raspberry Pi equipment control to re-focus the item inside the camera outline (either by controlling the robot or inclining and panning the camera).

CONCLUSION

A novel methodology is applied to identify the colored object in real-time when the object is in motion. To get the accurate result HSV, RGB, YUV lters can be used instead of Kalman lter. Red, Blue, Green colors can be detected by using this methodology. This project can be implemented in various elds of our daily life like Video surveillance, sports, medical applications, and robotics. Based on the results produced, the system has been tested to be e ffective at detecting color.

REFERENCES

- [1] <https://learning.oreilly.com/library/view/raspberry-pi-for/9781785288326/ch08s07.html>
- [2] Vladimir Kravtchenko . (1999). Tracking Color Objects in Real Time The University of British Columbia, August 27,123-126.
- [3] McAndrew A. (2004). An introduction to digital image was processing with matlab notes for scm2511 image processing,” School of Computer Science and Mathematics, Victoria University of Technology.
- [4] D. Senthamaraikannan,S. Shriram, Dr. J. William,(2014). Real Time Color Recognition,” *International Journal of Innovative Research In Electrical, Electronics, Instrumentation and Control Engineering* Vol. 2, Issue 3.
- [5] Rani NS, Neethu OP & Ponnath N. (2015). Automatic Vehicle Tracking System Based on Fixed Thresholding and Histogram Based Edge Processing, *International Journal of Electrical and Computer Engineering*, Vol.5, No.4.
- [6] Nalluri, S. K., & Parasaram, V. K. B. (2015). Automating Software Builds with Jenkins: Design Patterns and Failure Handling. *International Journal of Technology, Management and Humanities*, 1(01), 16-33. <https://doi.org/10.21590/ijtmh.01.02.03>
- [7] Rani NS, Verma SK & Joseph A. (2016). A Zone Based Approach for Classification and Recognition Of Telugu Handwritten Characters, *International Journal of Electrical and Computer Engineering*, Vol.6, Issue 4, PP 114–118.
- [8] Kalisa Wilson.(2016) .*International Journal of Signal Processing, Image Processing and Pattern Recognition* Vol.9, No.4, (2016), pp.331– 338.
- [9] A. Pan Thu Tun, B. Khine Myint. (2016). MonColor Paper Detection System, *IOSRJournalof Electronics and Communication Engineering (IOSR-JECE)* e-ISSN: 2278-2834,p- ISSN: 2278–8735. Volume 11, Issue 5, Ver. I (Sep.-Oct), PP 110–114
- [10] Arshi Prabhakar, Neeti and Rakhi Devi. (2017).Di fferent Color Detection In an RGB Image, *International Journal of Development Research* ‘Vol. 07, Issue, 08, pp.14503–14506.
- [11] P. Sudharshan Duth, M. Mary Deepa. (2018). Color detection in RGB modeled images using MAT LAB,” *International Journal of Engineering & Technology*, 7 (2.31), 29–33 .